

K
DO

简介

K DO EN 50205

IEC 61508 SIL3 SC3
SIS ESD

- 1002
-
-
-
-

技术参数

电源参数

20V~32V DC(24V)
≤2.2 W/24V DC

输入参数

≤90mA
≤3ms
100ms
≤15Ω

输出参数

DO
3NO+1NC 2NO+2NC
AgSnO₂+0.2μmAu

AC-15 5A/230V DC-13 5A/24V
10A gL/gG(NO) 6A gL/gG(NC)



时间参数

≤200ms
≤50ms
≤4Hz

环境参数

IEC/EN 60947 IEC 61326-3-1
IEC/EN 61000-6-2 IEC/EN 61000-6-4
250 V AC
6000V (1.2/50μs)
1500V AC 1 min
IEC 60947-1
10Hz~55Hz 0.35mm
III
2
IP20


产品型号	输入设备	触点数量
NPFSR-K2P31AMD	安全开关 DO	3NO+1NC
NPFSR-K2P22AMD	安全开关 DO	2NO+2NC

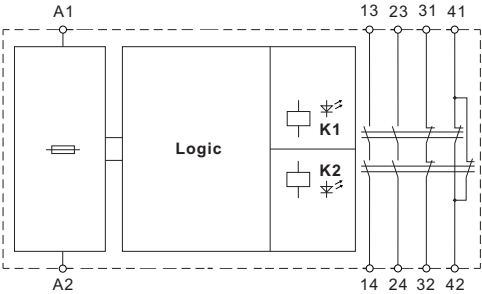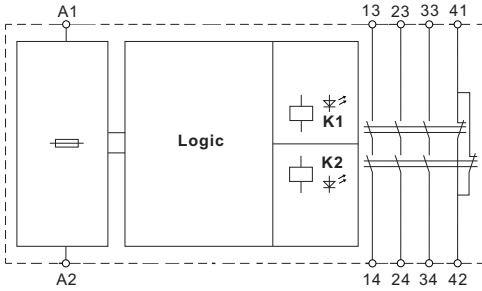



警告！

1 /

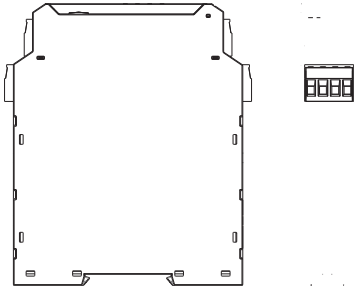

Nanjing New Power Electric Co., Ltd.

