


NPWD-C18D.RTD

1 4 ~ 20 mA 1 RS-485

RS-485


MODBUS-RTU

PC

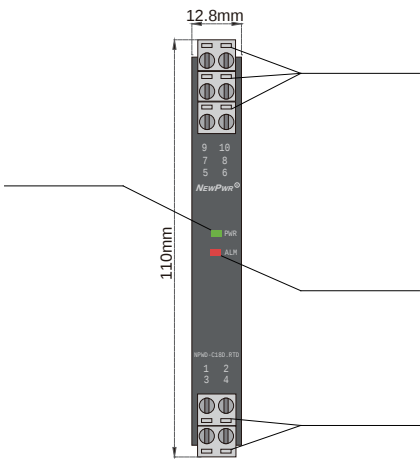

18V DC 60V DC
0.9W
Pt100 Cu100 Cu50 BA1 BA2
≤ 20Ω /
1 4 20mA
2 : RS485
R_L ≤ 550Ω
MODBUS-RTU ≤1000m ≤32
≤ 19.2Kbps
40ppm/
≤ 500ms
IEC 61326-3-1
≥ 1500V AC / /
≥ 100MΩ / /
-20 +60
-40 +80
12.8mm× 110mm× 117mm

0V/mA
110% 0mA~20mA
0mA 22mA

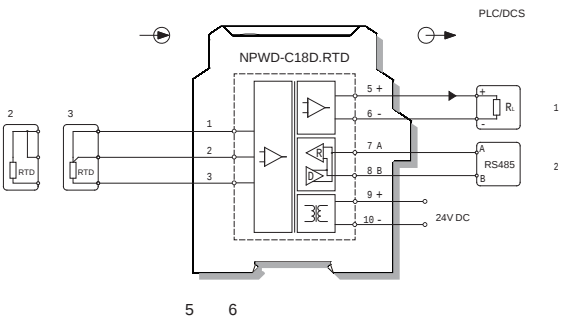

NPWD-C18D.RTD

PB

1

1

1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA

PT100	-200	+850	<100 , ±0.1	≥100 , ±0.1%F.S.
Cu50	-50	+150	<100 , ±0.1	≥100 , ±0.1%F.S.
Cu100	-50	+150	<100 , ±0.1	≥100 , ±0.1%F.S.