


NPFSR-K122MD

Input: E-STOP, Safety gate

Output: 2NO+2NC

The inputs of K series E-STOP, safety gate input safety relays are normally closed contact signals, which are used for emergency braking or the protection of people entering dangerous areas, and widely used in machining and other industries.


- 1oo2 architecture
- With detection of shorts across contacts
- With monitored manual reset function
- The safety function remains effective in the case of a component failure
- The correct opening and closing of the safety function relays is tested automatically in each on-off cycle

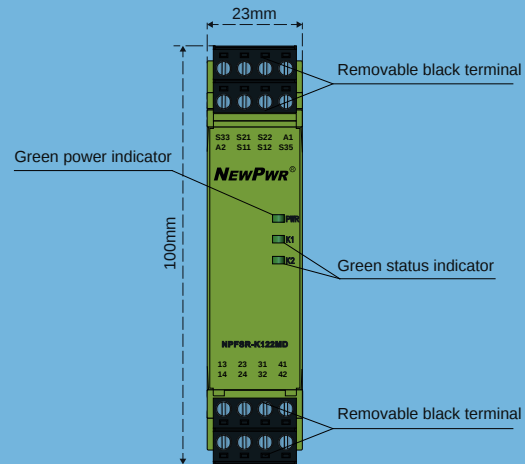

Parameters

Voltage range	24V AC/DC
Voltage tolerance	0.85 ~ 1.1
AC frequency	50Hz ~ 60Hz
Power dissipation	2.2W (24V DC), 1.4VA/24V AC
Current consumption	50mA/24V DC
Cable resistance	≤ 100Ω
Input devices	E-STOP button, Safety gate
Signal type	2NO+2NC
Contact type	Forced guide
Contact material	AgSn
Contact loading	1A/250V AC, 0.5A/30V DC
Contact fuse protection	1A/250V AC, 0.5A/30V DC
Switch-on	10ms
Release	10ms
Recovery time	10ms
Supply short interruption	20ms
EMC	According to IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
Rated insulation voltage	250V AC
Rated impulse voltage	6000V(1.2/50us)
Dielectric strength	1500V AC, 1 min
Clearance and creepage	According to IEC 60947-1
Vibration	10Hz ~ 55Hz, 0.35mm
Overvoltage category	III
Pollution degree	2
Protection type	IP20
Ambient temperature	-20°C ~ 50°C
Storage temperature	-40°C ~ 80°C
Operating altitude	≤ 2000m
Mechanical life	10×10 ⁶ cycles

Functional Block Diagram

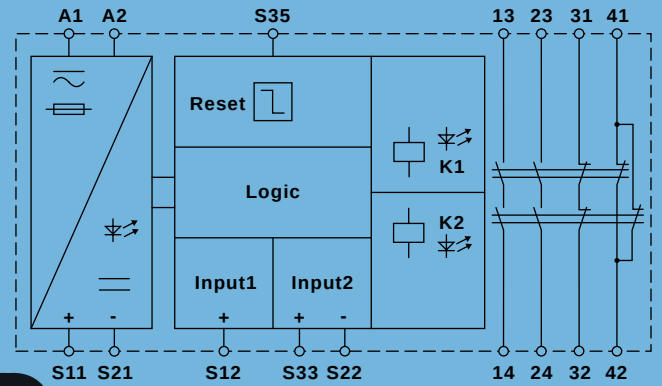

Safety Values

Performance level	PLe, according to ISO 13849
Category	Cat.4, according to ISO 13849
PTI (T _m)	20 years, according to ISO 13849
DC _{avg}	99%, according to ISO 13849
MTTF _D	164 years, according to ISO 13849
CCF	68, according to ISO 13849
SIL	SIL 3, according to IEC 62061
SIL CL	SIL 3, according to IEC 62061
HFT	1, according to IEC 62061
SFF	1, according to IEC 62061
PFD _{avg} /PTI = 20 years	1.29×10 ⁻⁵ , according to IEC 62061
PFH	1.49×10 ⁻¹⁰ 1/h, according to IEC 62061
Stop Category	0, according to IEC 60204