

NPEXA-C11H
NPEXA-C111H

4 ~ 20 mA

PC


-200~1372°C
-120~1000°C
-140~1200°C
-270~400°C
-200~1300°C
-50~1768°C
~~400~1280°C~~
0~2315°C
~~0~2315°C~~
-100~800°C

18V DC ~ 60V DC
0.8W (24V)
1.2W (24V)

/ 4 ~ 20mA
R_L ∅ 550
R_L < [(U-3)/0.02] ; U
1°C (-20°C ~ +60°C)
30ppm/°C
∅ 500ms
IEC 61326-3-1
∅ 3000V AC (/)
∅ 1500V AC (/)
∅ 100M (/ /)
-20°C ~ +60°C
-40°C ~ +80°C
17.8mm× 110mm× 117mm
4mA~20mA NE43

0 1 2 A B

C T4 ~ T6

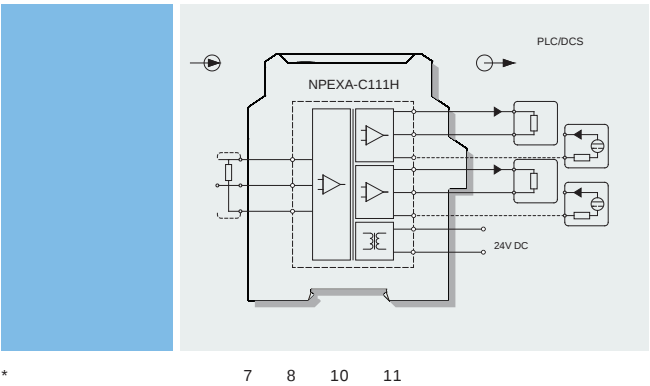

* 7 8 10 11

(CQST)

[Ex ia Ga] C
(Um) 250V
(1 2)
U₀=8.7V, I₀=33mA, P₀=72mW
C₀=3.58>F, L₀=21mH

NPEXA-C1□□H□

PB

1

1

1

1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA