

→ 简介

/
 /
 ()

→ 技术参数

防爆等级: [Ex ia Ga] IIC [Ex ia Da] IIIC

供电电源:

(14+ 15-)

18V DC ~ 60V DC (24V DC)

输入信号类型 (1 2 3 4 5 6):

允许引线电阻: ≤ 20 Ω/

输出信号类型 (7 8 9 10 11 12):

4 mA ~ 20 mA 20 ~ 4 mA

0(4) mA ~ 20 mA 0 mA ~ 10 mA 20 ~ 4 mA

0(1) V ~ 5 V 0 V ~ 10 V

4 ~ 20 mA NAMUR NE43

输出纹波: ≤ 5 mV_{rms} (250 Ω)

负载能力:


$R_L \leq [(U-3)/0.02] \Omega$ U

0(4) mA~20 mA [(7 0 V 1 7 → 1

0(1) V ~ 5 V: ≥ 1 MΩ 0 V ~ 10 V: ≥ 2 MΩ

隔离传输准确度 (25 °C ± 2 °C 不含冷端补偿):

C



Nanjing New Power Electric Technology Co., Ltd.

→ 外形结构

× × : 17.8mm×110mm×117mm


→ 应用

/

/

/

/

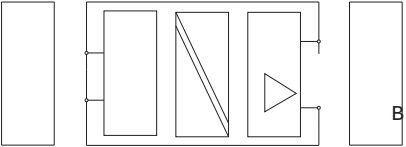

B.

DIN BUS BUS

|| 1:

→ BUS规格

→ 安装

○ DIN IEC 60715 35mm

○ C.

→ 面板显示

- PWR: ()
- CH1 CH2: ()
- 1 2 LED
- LED RTD ()
- LED TC LED

→ 编程及校准

○

○

○

○

→ 注意事项

- IP20 ()
 - IEC/EN 60664-1 2
 - IEC 61000-4
 -
 -
- 补充说明
-